



Nokia 3300B Keyboard Disassembly

Describes how to replace the keyboard of the Nokia 3300B.

Written By: Chris Colwell



INTRODUCTION


Describes how to replace the keyboard of the Nokia 3300B.

Step 1 — Battery



- Flip the Nokia over with the back-side facing you.
- Gently press the button on the back of the battery cover to slide the cover up.

Step 2

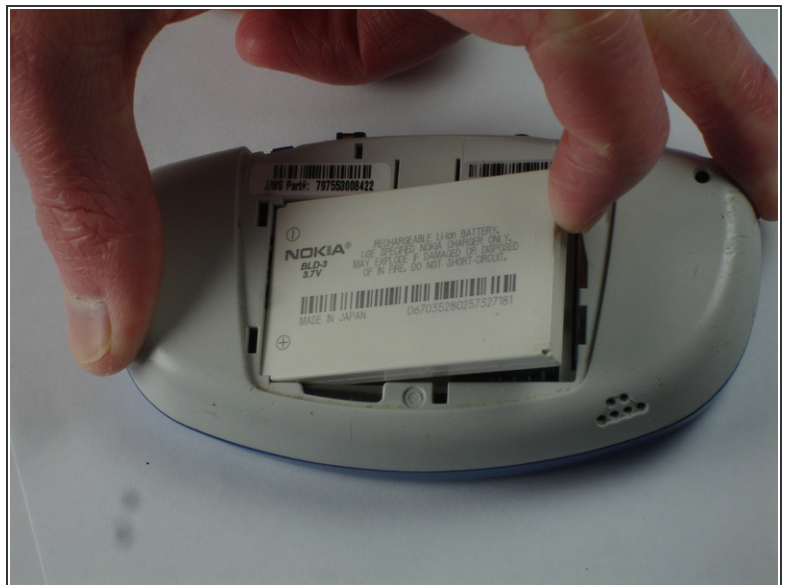

- Lift the battery out of the phone.
- Note: It is easiest to lift the battery out of the phone from the right-hand side, as seen in the picture.

Step 3 — Nokia 3300B Keyboard Disassembly




- Gently push the blue tabs on the top of the phone out of their slots.
- With the phone facing up, pop the blue faceplate off by using your fingernail (or some tweezers) and working your way around the phone.
- Note: If the blue cover does not detach easily use your finger nails to try and split it open, as seen in the picture.

Step 4



- With the screen still facing you, remove the blue faceplate.

Step 5

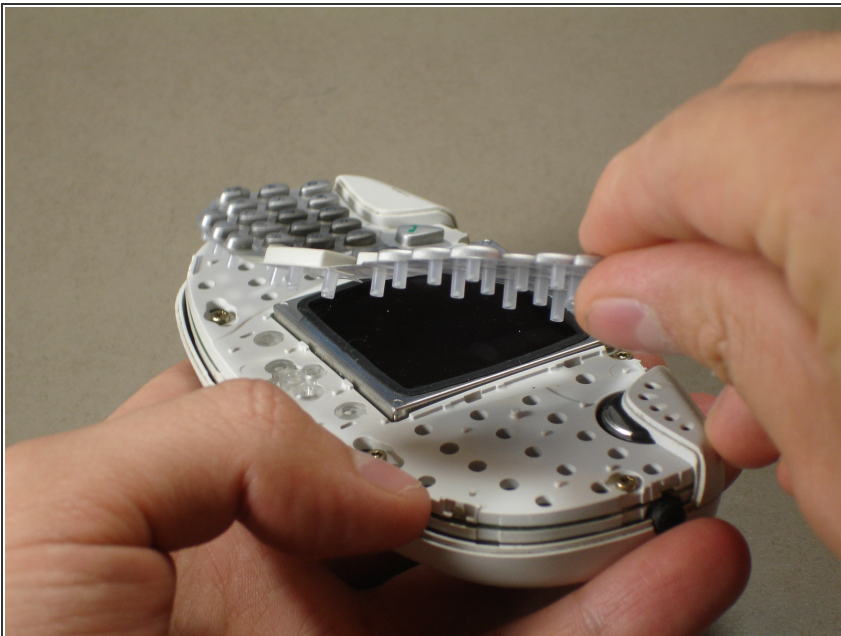

- Grab the sides of the keypad and lift it up vertically.
- ⚠ If you encounter resistance while removing the keypad, be sure to lift up evenly on both sides, so the pins do not snap.
- To replace or re-install the keypad, place the keypad back onto the phone, making sure that the plastic pegs all enter their proper holes.

To reassemble your device, follow these instructions in reverse order.